


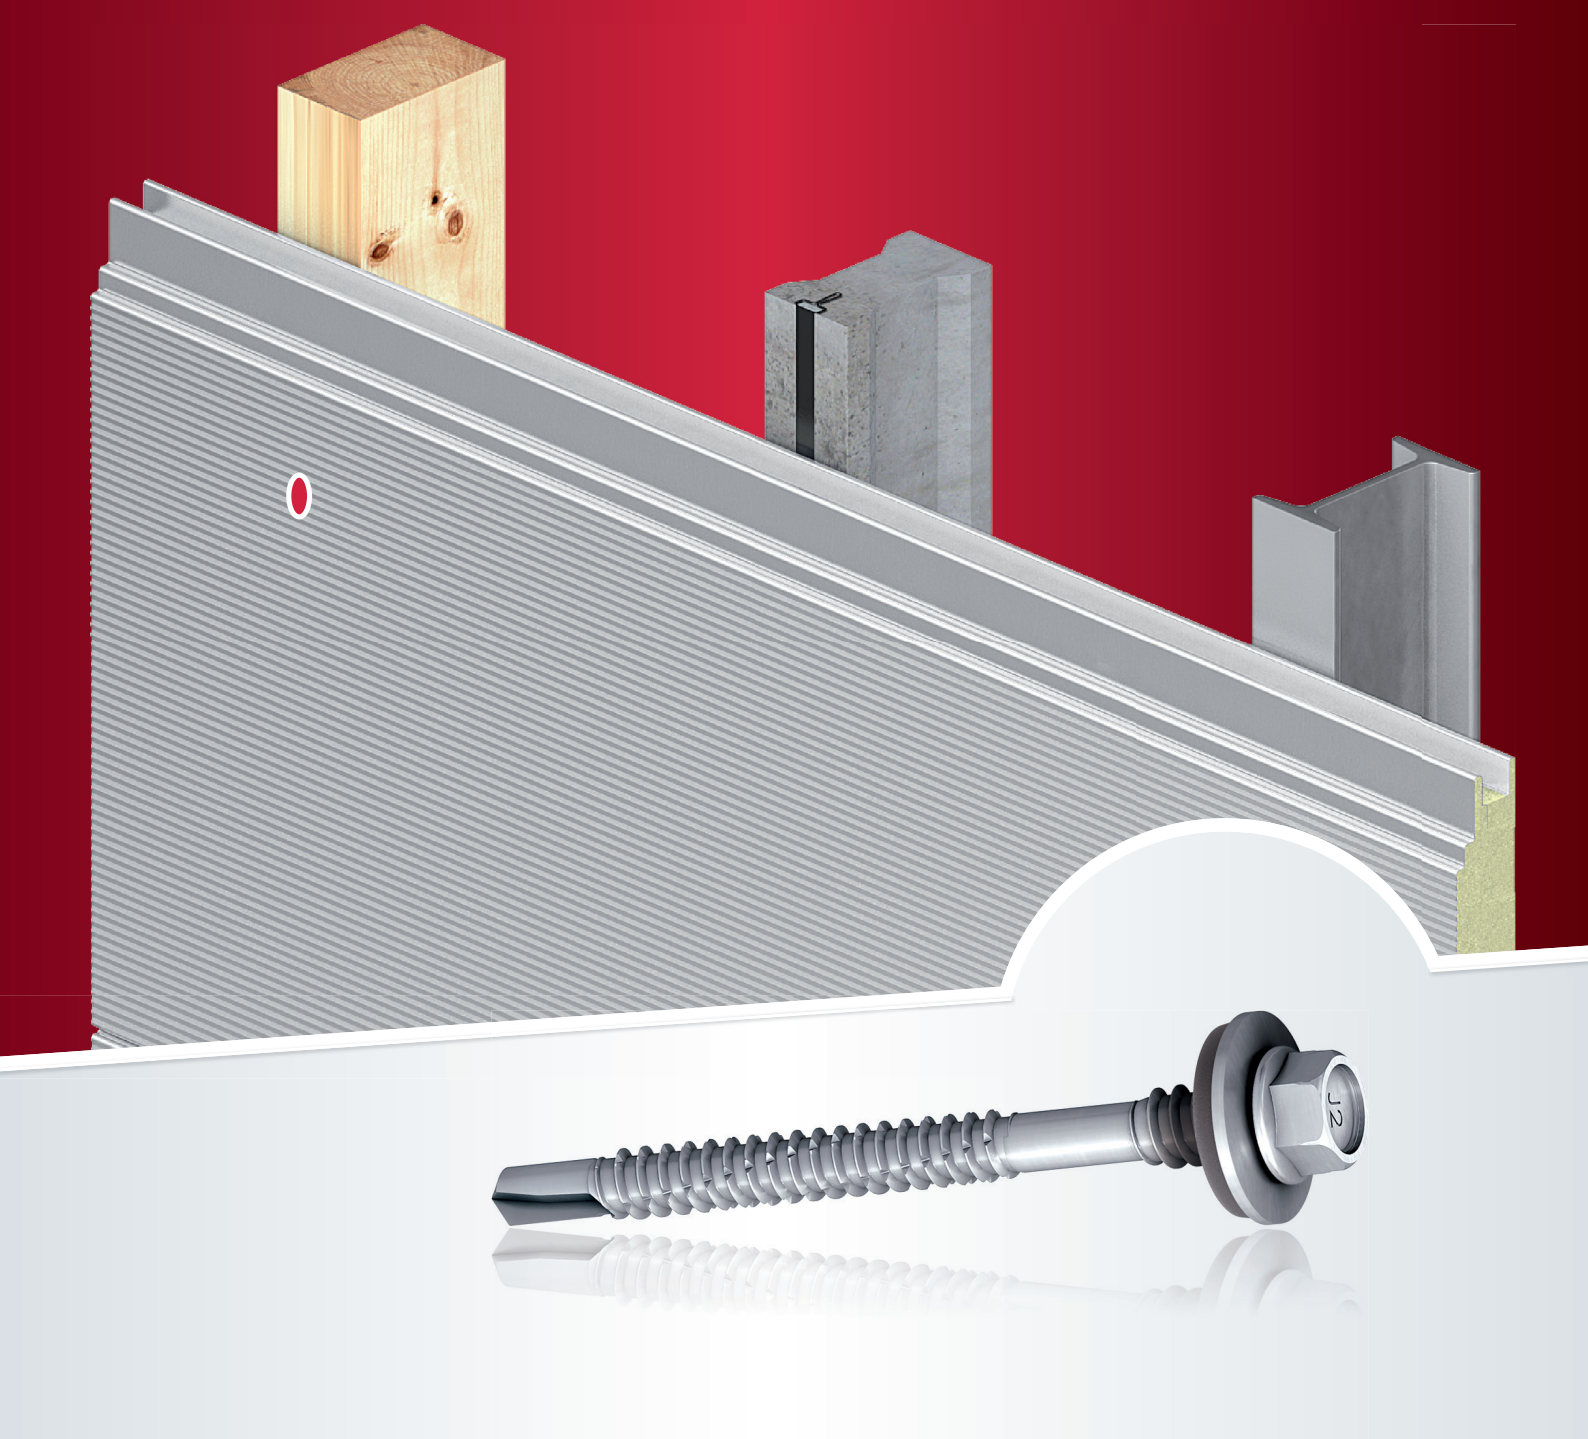

EJOT® SAPHIR self-drilling screw JT2-D-6H-5.5/6.3

Fastening sandwich elements to 1.5-5 mm steel substructures

Self-drilling screws JF2/JT2

Case-hardened steel, zinc-plated



EJOT® SAPHIR self-drilling screw JT2-D-6H-5.5/6.3

Length [mm]	For sandwich panels [mm]	Clamp thickness [mm]	PU	Price/100 [EUR]	Order description	Article number
Sealing washer V16, Ø 16 mm						
62	32.0 - 44.0	30 - 48	250		JT2-D-6H-5.5/6.3x62-V16	3 553 421 674
82	42.0 - 64.0	50 - 68	200		JT2-D-6H-5.5/6.3x82-V16	3 553 621 674
102	62.0 - 84.0	42 - 88	200		JT2-D-6H-5.5/6.3x102-V16	3 553 821 674
122	82.0 - 104.0	62 - 108	150		JT2-D-6H-5.5/6.3x122-V16	3 557 021 674
152	102.0 - 134.0	92 - 138	150		JT2-D-6H-5.5/6.3x152-V16	3 555 921 674
172	132.0 - 154.0	112 - 158	150		JT2-D-6H-5.5/6.3x172-V16	3 556 421 674
192	152.0 - 174.0	132 - 178	100		JT2-D-6H-5.5/6.3x192-V16	3 556 621 674
Sealing washer E19, Ø 19 mm						
62	32.0 - 44.0	30 - 48	250		JT2-D-6H-5.5/6.3x62-E19	3 553 412 674
82	42.0 - 64.0	50 - 68	200		JT2-D-6H-5.5/6.3x82-E19	3 553 612 674
102	62.0 - 84.0	42 - 88	200		JT2-D-6H-5.5/6.3x102-E19	3 553 812 674
122	82.0 - 104.0	62 - 108	150		JT2-D-6H-5.5/6.3x122-E19	3 557 012 674
152	102.0 - 134.0	92 - 138	100		JT2-D-6H-5.5/6.3x152-E19	3 555 912 674
172	132.0 - 154.0	112 - 158	100		JT2-D-6H-5.5/6.3x172-E19	3 556 412 674
192	152.0 - 174.0	132 - 178	100		JT2-D-6H-5.5/6.3x192-E19	3 556 612 674

Application Range

- Fastening sandwich elements to 1.5-5 mm steel substructures

Features


- Case-hardened steel
- Climadur coated – high-grade coating to improve the corrosion protection (15 Kesternich cycles, DIN 50018, 1997)
- Steel sealing washer, zinc-plated or stainless steel
- Pre-assembled sealing washer
- With free spin zone under screw head
- High thread

Technical Data

Drive	Hexagon AF8
Ø screw	5.5 mm
Ø high thread	6.3 mm



AF8



Cross reference

Accessories
Self-tapping screw JZ7-6.3
Metal screwdriver SCS 6.3